

STR12 Series Overview

Description

The 1/2 inch through-bore provides routing space for hydraulics, pneumatics or for a concentric shaft mount.

The STR12 with 12.7mm through hole, 56mm OD, uses our unique fiber brush technology which offers several advantages over conventional slip ring contacts, including multiple points of contact per brush bundle, low noise, electrical and low contact wear rates. It can transmit signal(5A), 8A, multiple 8A current when 360° degree free rotating.



Specifications

Item	
Operating Speed	Max.600 RPM*
Number of Circuits	2~48 wires
Lead Wire	AWG22#, AWG18# Teflon, 300mm
Voltage	440V AC/DC
Operating Temperature	-40℃ to 80℃
Current Rating	Signal / 5A, 8A circuits
Noise	<0.01Ω
Torque	0.1N.m; +0.03N.m/6rings
Housing Material	Al alloy
Protection Grade	IP51

* Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature

Options


- 75 O.D. flange with 4 mounting holes
- Splash seals for dust and moisture resistance
- Various axial and radial lead exits are available
- Longer lead lengths are available
- Higher current and voltage capacity per circuit
- Support mixed high speed data transmission
- Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- Aviation plug, terminal and heat-shrink tube are optional
- IP 65 rated slip ring available

INTRODUCE

STR12

2

STR12 Series Dimensions

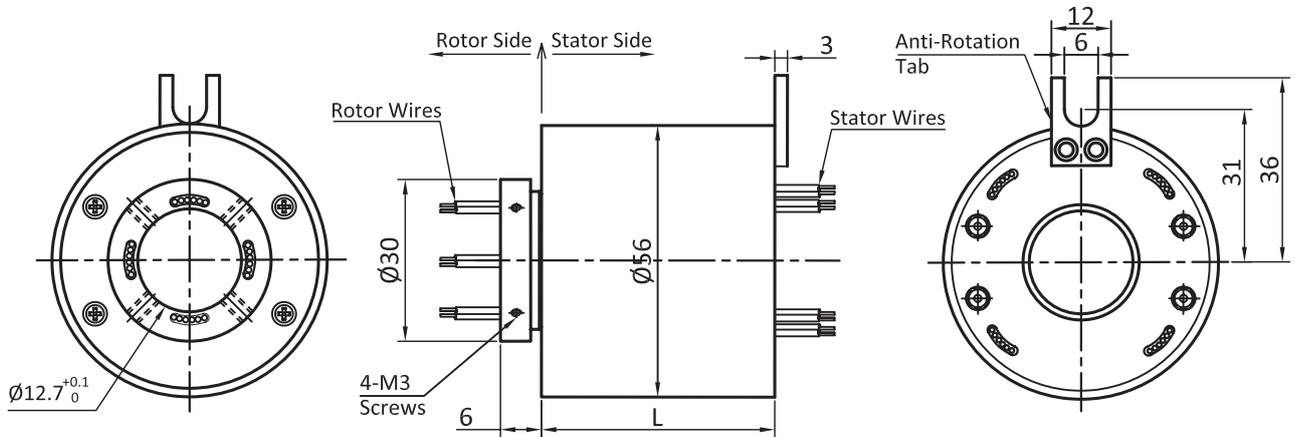

Notes:

1. Drawings not actual size, dimensions are in millimeters
2. Rotor and stator leads exit 4 places, 90° apart
3. Flange mounting is options

Part# List

Model#	Power(8A)	Signal or 5A	Length(mm)	Model#	Power(8A)	Signal or 5A	Length(mm)
STR12-P2	2	0	27	STR12-P6S12	6	12	74
STR12S2	0	2	27	STR12-P18	18	0	74
STR12-P3	3	0	30	STR12-S18	0	18	74
STR12-P2S2	2	2	33	STR12-P12S12	12	12	91.2
STR12-P4	4	0	33	STR12-P24	24	0	91.2
STR12-S6	0	6	39.2	STR12-S24	0	24	91.2
STR12-P6	6	0	39.2	STR12-S30	0	30	108.2
STR12-P12	12	0	57.2	STR12-S36	0	36	125.4
STR-S12	0	12	57.2	STR12-S48	0	48	156

Notes: Not all of the model are list in this table, if can not find suitable products, please contact us freely.

Lead wire color code(From the rotor)					
Ring#	Color	Description/AWG	Ring#	Color	Description/AWG
1	RED	Signal / AWG22# 8A / AWG18#	7	RED	Signal / AWG22# 8A / AWG18#
2	BLK		8	BLK	
3	BLU		9	BLU	
4	BRN		10	BRN	
5	WHT		11	WHT	
6	GRY		12	GRY	

Notes:

6 wires for 1 group color, from 7~12 circuits would repeat the same color.